


PAM Version 1.2

TDSi Integration

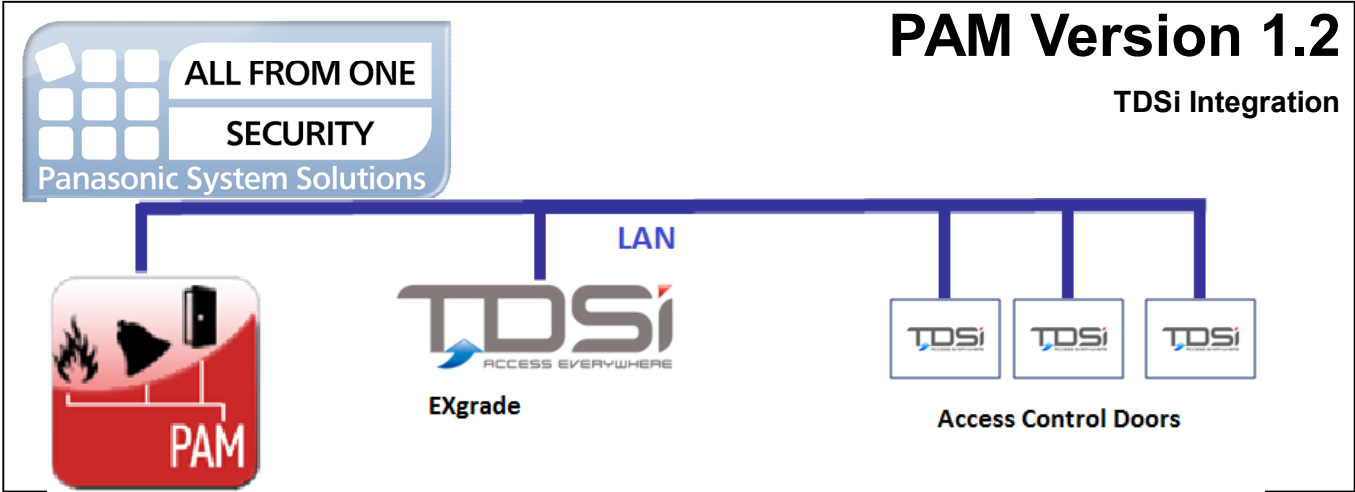

PRODUCT FEATURES

Panasonic Alarm Manager (PAM) further enhances a Panasonic IP CCTV system by enabling advanced alarm handling between alarm sources and targets. PAM also allows for the integration with many third-party systems to create a very versatile and flexible alarm handling solution.

Main function of PAM is to be able to accept alarm inputs simultaneously, and from those to be able to generate a number of subsequent actions. Alarm actions include camera preset calls, start recording, call video images to monitors etc.

TDSi INTEGRATION

PAM receives reader and Door events from TDSi over TCP/IP. All ACUs are registered with Net2 for events monitoring. Following events are supported in this integration:

Invalid Card	Access Denied, Invalid Card
Door Force	Door Open, Door Force, Door
Main Failed	If mains failed
Tamper Alarm	Door Tamper Alarm
ACUs Status	ACT on-line / off-line

Latest Versions

- EXgrade (V4.1)
- PAM Version 1.2

SYSTEM EXAMPLE

